
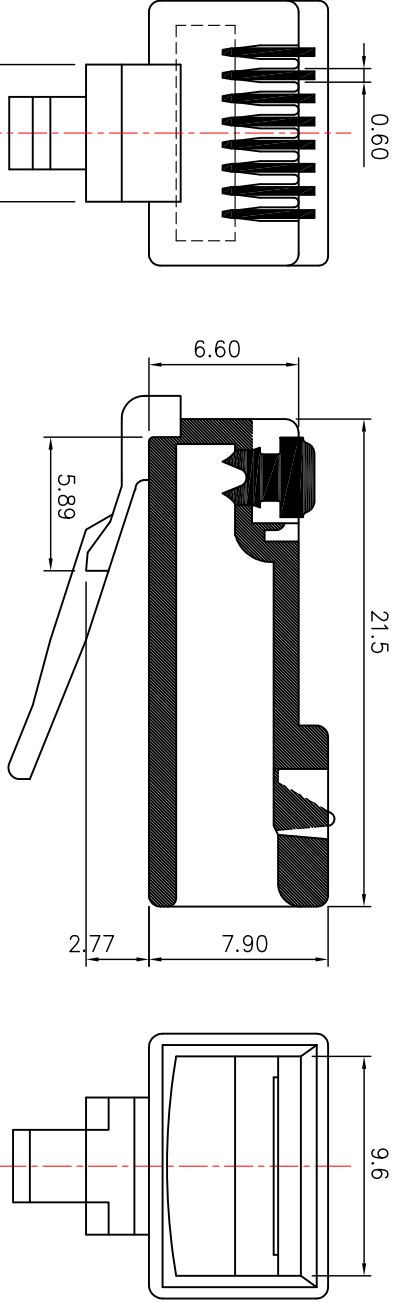


REV.	DESCRIPTION	DATE

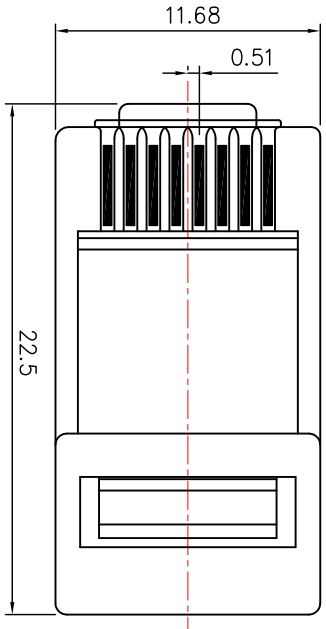

MOD - C588X - R - XXu - DXV

Terminal Type :
 1: 2 Prongs
 2: 2 Prongs For Solid Wire
 3: 3 Prongs

Cable Type :
 R: Round Cable

Plating Option :
 6Fu"
 6u"
 15u"
 30u"
 50u"


Discern Type
 Color
 UL94V-0

NOTE:

A. Material:
 1. Housing : PC, UL94V-2 / UL94V-0.
 2. Terminal : Copper Alloy.

B. Plating:
 1. Terminal : Plating is based on 50u" Nickel Under Plating, Selective Gold Plated on Contact Touch Area.
 C. Applicable Wire Gauge : 24~26AWG OD:5~6.5mm
 D. Operation Temperature : -40°C to 125°C

Insert Bar : MOD-C5-DXV

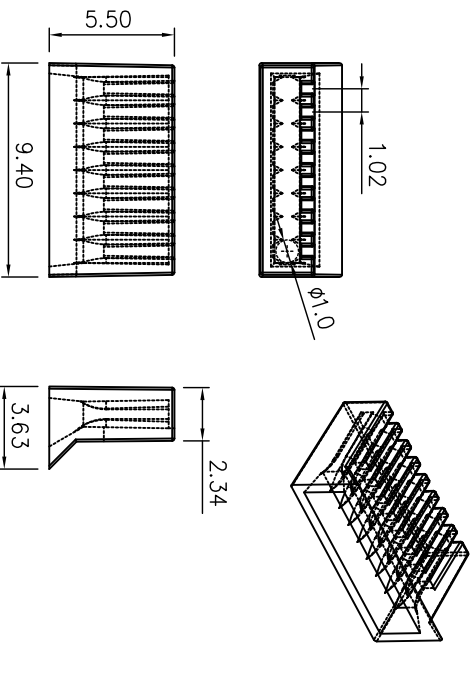

TREMINAL	2 Prongs For Stranded Wire 多芯線用二叉金片	2 Prongs For Solid Wire 單芯線用二叉金片(大拐角)	3 Prongs For Solid Wire 單芯線用三叉金片
----------	----------------------------------------	------------------------------------------	-------------------------------------

<p>TOLERANCE .X ±0.250 .XX ±0.150 .XXX±0.100</p> <p>UNITS : mm</p> <p>SCALE 3 : 1</p>	<p>DRAWER <i>Chiu Chuu Sui</i></p> <p>CHECK <i>Yu Siung Sui</i></p> <p>DESIGNED <i>Chiu Chuu Sui</i></p> <p>APPROVAL <i>Shue Jang Sui</i></p> <p>DATE 10 / 4 / 2013</p> <p>SIZE A4</p>	<p>NAME SynLight 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i></p> <p>Part No. MOD-C588X-R-XXu-DX</p> <p>Insert Plug RJ45 8P8C Two-Piece Insert Bar Discern Type</p> <p>Part No. MOD-C588X-D</p>
------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------