




REV.	DESCRIPTION	DATE

NOTE:

- A. Material:
 1. Housing : PC , UL94V-2.
 2. Terminal : Copper Alloy.

- B. Plating:
 1. Terminal : Plating is based on 50u" Nickel Under Plating.
 Selective Gold Plated on Contact Touch Area.

- C. Specification :
 Current Rating : 125V AC , 1.5A
 Insulation Resistance : 500M OHM Min
 Contact Resistance : 30m OHM Max
 Dielectric Voltage : 1000VAC for one minute
 Operation Temperature : -40°C to 85°C
 Operating : 750 Cycles Min

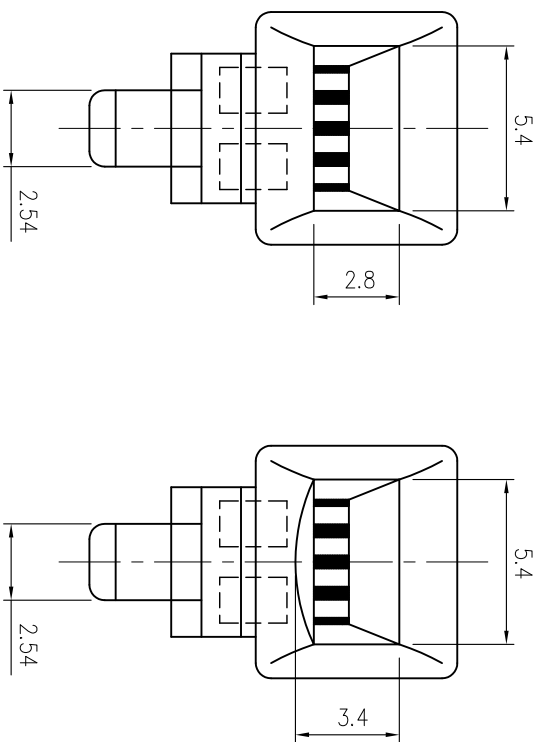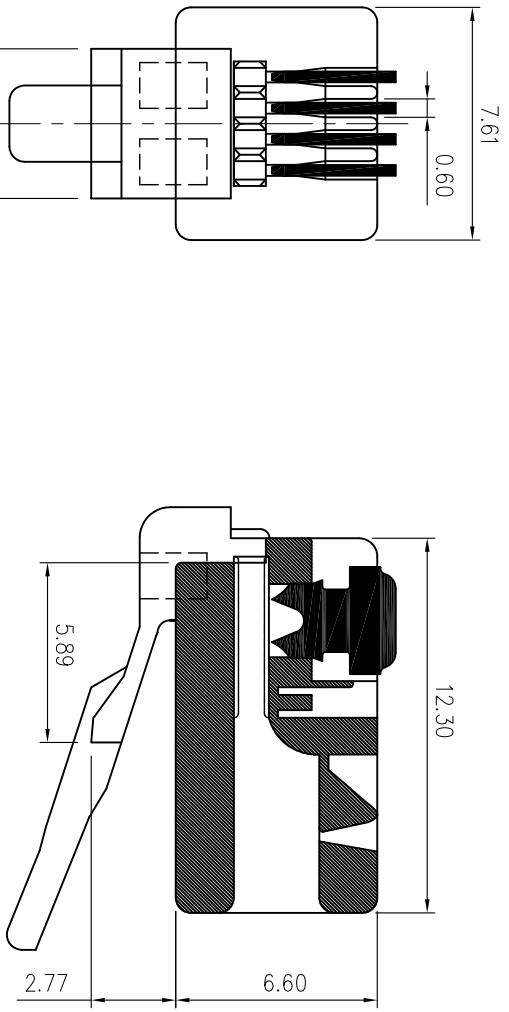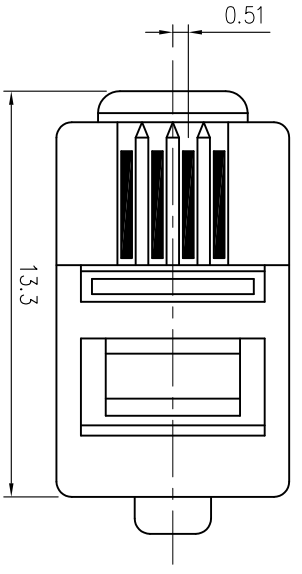

Flat Cable

Round Cable

TREMINAL	CABLE	TERMINAL	CABLE	TOLERANCE	DRAWER	NAME
2 Prongs For Stranded Wire 多芯線用二叉金片	MOD-441-F-XXU"	2 Prongs For Solid Wire 單芯線用二叉金片	MOD-441-F-XXU"	.X ±0.250 .XX ±0.150 .XXX±0.100 UNITS : mm SCALE 4 : 1	DRAWER Check Design Approval Date	SynLight 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i> Modular Plug RJ9 4P4C Flat & Round Cable.
3 Prongs For Solid Wire 單芯線用三叉金片	MOD-443-F-XXU"	3 Prongs For Solid Wire 單芯線用三叉金片	MOD-443-F-XXU"		MOD-441-R-XXU" MOD-443-R-XXU"	