






REV.	DESCRIPTION	DATE

NOTE


- A. Insulator : High temp. plastic, UL 94V-0.
- B. Contact : Brass T=0.2 mm.
- C. Plating : Gold plated on contact area ; min 50u" Nickel plated all over ; min100u" Sn on solder tail area.
- D. Shell : Steel SPCC T=0.30mm
- E. Shell Plating : min 60u" Nickel Plated.

Electrical :

- A. Voltage: 30VAC(rms),
- B. Current: 1.8A
- C. Contact Resistance: 30mΩ (maximum)
- D. Insulation resistance: 100MΩ(minimum)
- E. Dielectric withstanding voltage: 100V AC
- F. Temperature: -55 °C to +105 °C
- G. Durability: > 1500 cycles.

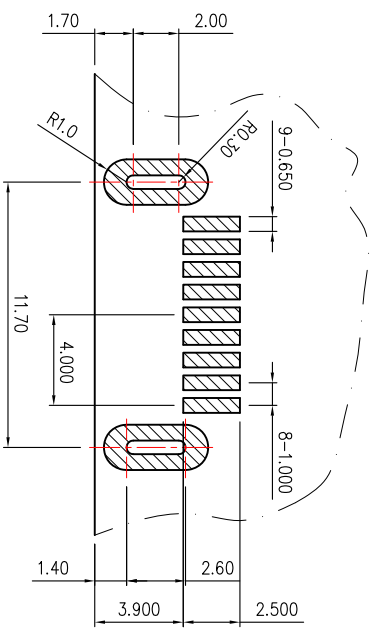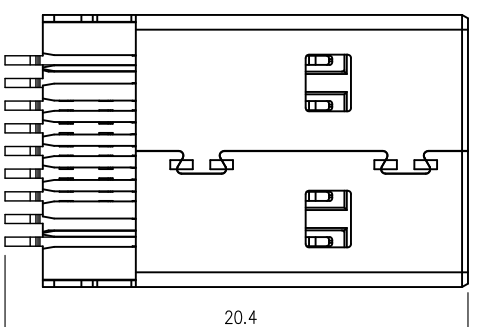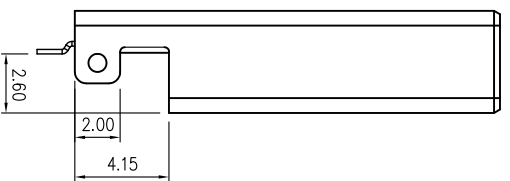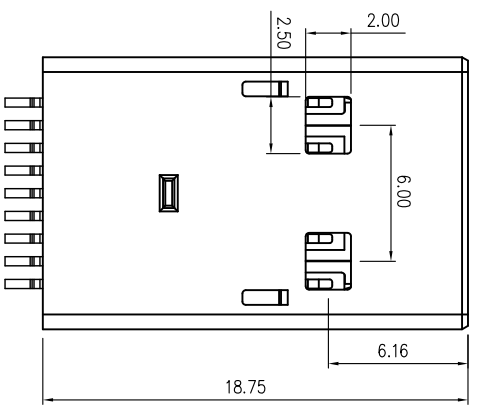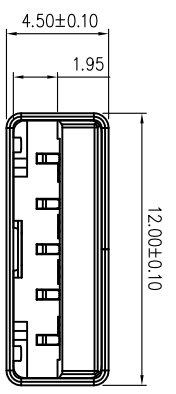

RoHS

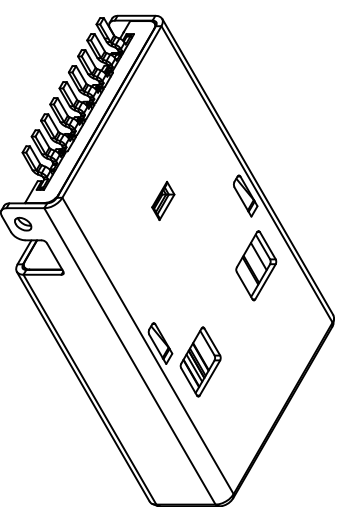

<p>TOLERANCE</p> <p>.X ±0.300</p> <p>.XX ±0.200</p> <p>.XXX±0.100</p>	<p>DRAWER</p> <p><i>Chin Chun Sui</i></p>		<p>NAME</p> <p>SynLight 日亮電子科技有限公司</p> <p><i>Syn-Light Electronic Technologies Inc.</i></p>
	<p>CHECK</p> <p><i>Shi Tsung Sui</i></p>	<p>DESIGNED</p> <p><i>Chin Chun Sui</i></p>	
<p>UNITS : mm</p>	<p>APPROVAL</p> <p><i>Hsue Sheng Sui</i></p>	<p>DATE</p> <p>1 / 20 /2015</p>	<p>DRAW NO.</p> <p>USB3-A-P-260N-120C</p>
<p>SCALE</p> <p>3 : 1</p>	<p>SIZE</p> <p>A4</p>	<p>SHEET</p> <p>1 OF 1</p>	<p>REV.</p> <p>A</p>