

REV.	DESCRIPTION	DATE






NOTE

Material:

- A. Insulator : High temp, plastic , UL 94V-0 .
- B. Contact : Copper alloy
- C. Plating : Selective gold plated on contact area ; min 50u" Nickel plated all over ; min 100u" Sn on solder tail area.
- D. Shell : Copper Alloy.
- E. Shell Plating : Nickel Plated.

Electrical :

- A. Current : 1.0A max.
- B. Contact Resistance: 30mΩ maximum
- C. Insulation resistance: 100MΩ minimum
- D. Dielectric withstanding voltage: 300V at sea level
- E. Temperature: -55°C to +105°C

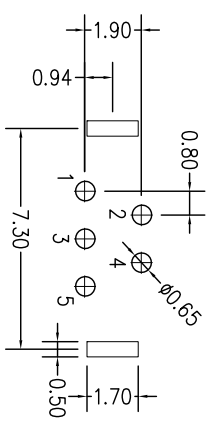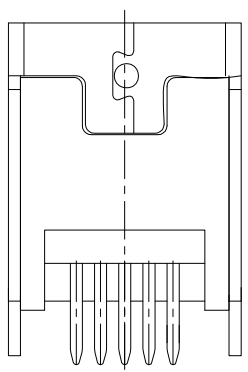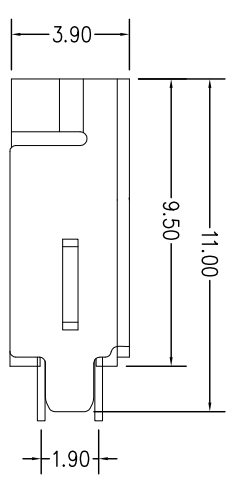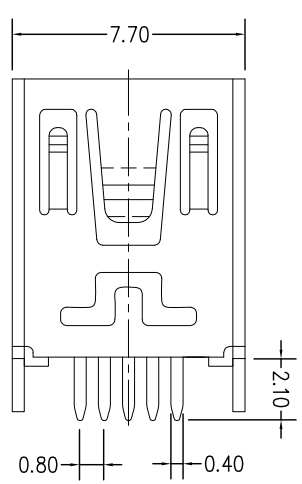

RECOMMAND PCB LAYOUT

TOLERANCE .X ±.30 .XX ±.25 .XXX ±.15	DRAWER <i>Chiu Chuan Siu</i>	 UNITS : mm	 UNITS : mm
	CHECK <i>Mhi Siung Siu</i>		
DESIGNED <i>Chiu Chuan Siu</i>	APPROVAL <i>Miao Siung Siu</i>	DATE 6 / 4 / 2012	SCALE 4 : 1
 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i>		PART NO. MSB-BR-5P-SFVX	SHEET 1 OF 1
NAME Mini-USB B type 180° 3Pin Female DIP 直插腳		DRAW NO. MSB-BR-5P-SFV	REV. A