



REV.	DESCRIPTION	DATE

**Material:**  
 1. Housing: Nylon-6T, UL94V-0.  
 2. Terminal: Copper alloy, Tin-plated.

**Electrical:**  
 1. Current rating : 1A AC,DC.  
 2. Voltage rating : 125V AC,DC.  
 3. Temperature range : -25°C to +85°C.  
 4. Contact resistance: 20mΩ max.  
 5. Insulation resistance: 100MΩ min.  
 6. Withstanding voltage: 250V AC/minute.

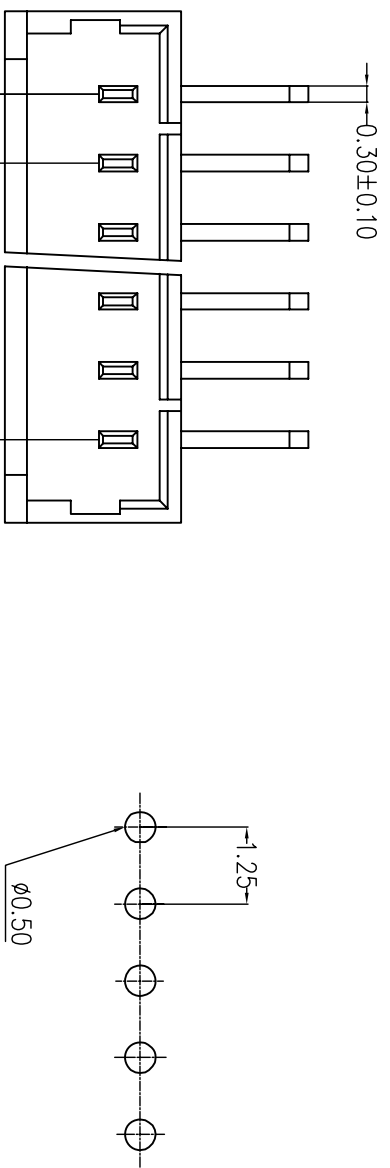

PCB Hole Layout

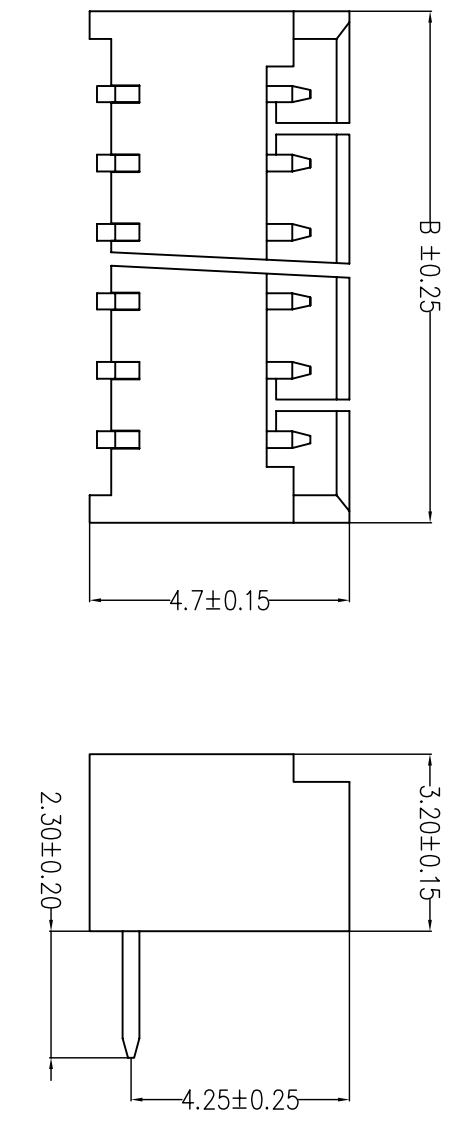

Circuits	Dimensions	
	A (mm)	B (mm)
02P	1.25	4.25
03P	2.50	5.50
04P	3.75	6.75
05P	5.00	8.00
06P	6.25	9.25
07P	7.50	10.50
08P	8.75	11.75
09P	10.00	13.00
10P	11.25	14.25
11P	12.50	15.50
12P	13.75	16.75
13P	15.00	18.00
14P	16.25	19.25
15P	17.50	20.50

DRAWER <i>Chiu Chuan Siau</i>		TOLERANCE X ±.20 XX ±.15 XXX ±.10	
CHECK <i>Shi Jeng Siau</i>		UNITS : mm	
DESIGNED <i>Chiu Chuan Siau</i>		SCALE FREE	
APPROVAL <i>Shaw Jeng Siau</i>		SIZE A4	
DATE 12 / 10 / 2010		PART NO. WTB-P125R-XX	
NAME 1.25mm Water 90°		DRAW NO. WTB-P125R	
SHEET 1 OF 1		REV. A	

**SynLight** 日亮電子科技有限公司  
*Sun-light Electronic Technologies Inc.*