



REV.	DESCRIPTION	DATE

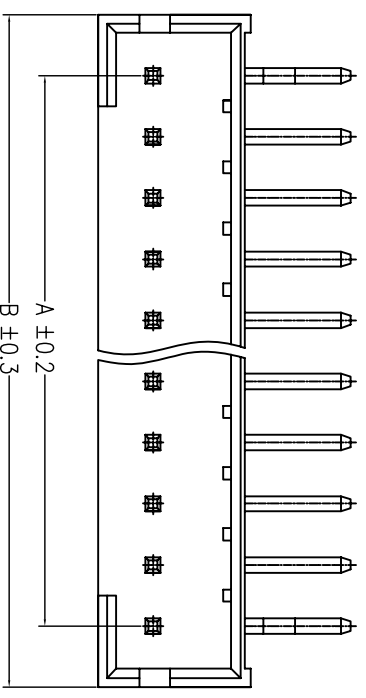

PCB Hole Layout

- Note:**
Material:
 1. Housing: Nylon-66, UL94V-0.
 2. Terminal: Copper alloy, Tin-plated.
- Electrical:**
 1. Current rating: 2A AC,DC
 2. Voltage: 100V AC,DC
 3. Contact resistance: 20mΩ Max
 4. Insulation resistance: 1000MΩ Min
 5. Withstanding voltage: 800V AC/min.
 6. Temperature: -25°C ~ +85°C

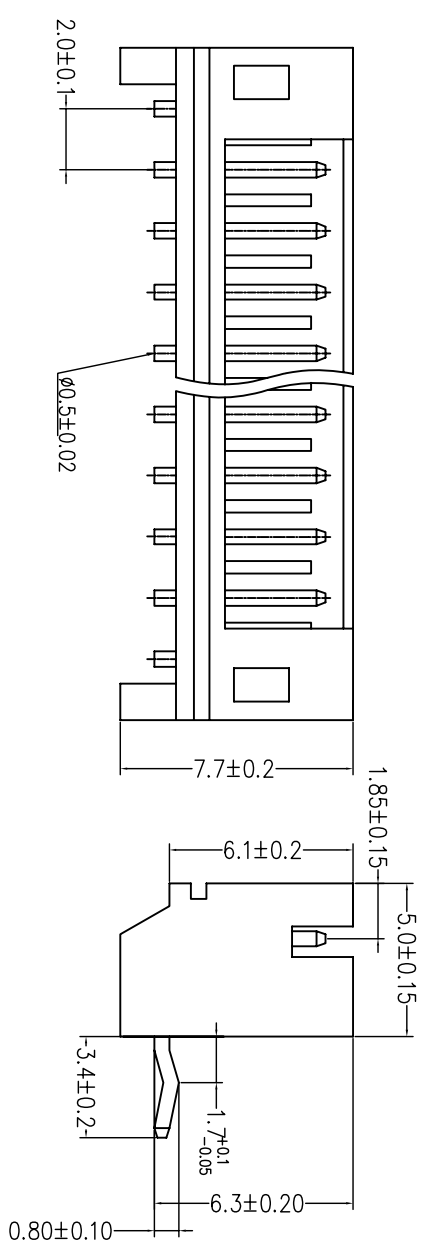

Circuits	Part No	Dimension mm	
		A	B
02	WTB-P20R-02	2.0	6.0
03	WTB-P20R-03	4.0	8.0
04	WTB-P20R-04	6.0	10.0
05	WTB-P20R-05	8.0	12.0
06	WTB-P20R-06	10.0	14.0
07	WTB-P20R-07	12.0	16.0
08	WTB-P20R-08	14.0	18.0
09	WTB-P20R-09	16.0	20.0
10	WTB-P20R-10	18.0	22.0
11	WTB-P20R-11	20.0	24.0
12	WTB-P20R-12	22.0	26.0
13	WTB-P20R-13	24.0	28.0
14	WTB-P20R-14	26.0	30.0
15	WTB-P20R-15	28.0	32.0
16	WTB-P20R-16	30.0	34.0

DRAWER <i>Chiu Chuan Siu</i>		TOLERANCE X ± 0.20 XX ± 0.15 XXX ± 0.10	
CHECK <i>Shi Jiong Siu</i>		UNITS : mm	
DESIGNED <i>Chiu Chuan Siu</i>		SCALE FREE	
APPROVAL <i>Shaw Tseng Siu</i>		DATE 12 / 10 / 2010	
NAME 2.0mm Wafer 90° φ0.50 打K		PART NO. WTB-P20R-XX	
DRAW NO. WTB-P20R		SHEET 1 OF 1	
REV.		A	

SynLight 日亮電子科技有限公司
Sun-Light Electronic Technologies Inc.