

REV.	DESCRIPTION	DATE



Note:

Material:



1. Housing: Nylon-66, UL94V-2.
2. Color: Beige.
3. Terminal: Copper alloy. Tin-plated.

Electrical:

1. Current rating: 4A AC,DC
2. Voltage: 250V AC,DC
3. Contact resistance: 20mΩ Max
4. Insulation resistance: 1000MΩ Min
5. Temperature: -25°C ~ +85°C

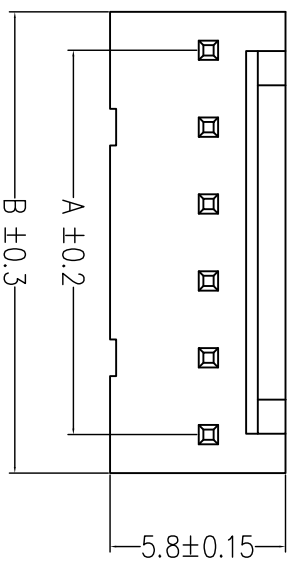

PCB Hole Layout

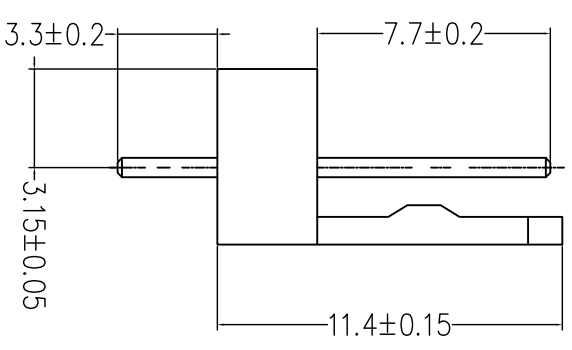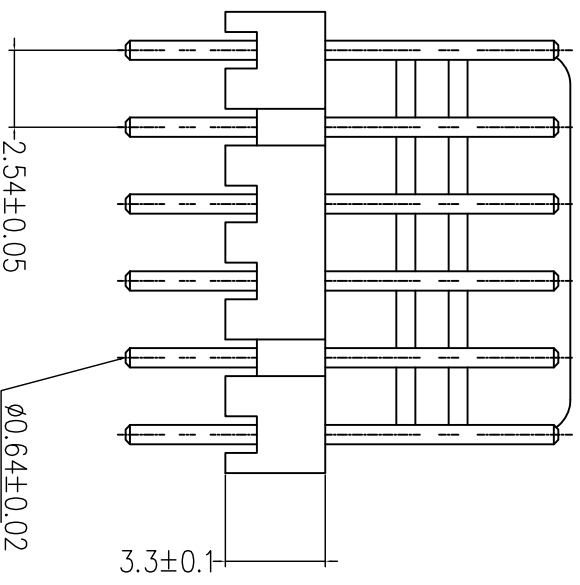

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78			
08	17.78	20.32			
09	20.32	22.86			
10	22.86	25.40			
11	25.40	27.94			

<p>TOLERANCE</p> <p>X ± X.XX</p> <p>XX ± X.XX</p> <p>XXX ± X.XX</p>		<p>DRAWER</p> <p><i>Chiu Chuan Siao</i></p> <p>CHECK</p> <p><i>Shi Tsung Siao</i></p>		<p>NAME</p> <p>SynLight 日亮電子科技有限公司</p> <p>Sun-light Electronic Technologies Inc.</p>	
<p>UNITS: mm</p> <p>UNIT SYMBOL</p>		<p>DESIGNED</p> <p><i>Chiu Chuan Siao</i></p>		<p>DATE</p> <p>10 / 13 / 2011</p>	
<p>SCALE</p> <p>FREE</p>		<p>APPROVAL</p> <p><i>Shaw Tsung Siao</i></p>		<p>PART NO.</p> <p>WTB-P254-XX</p>	
<p>SIZE</p> <p>A4</p>		<p>SHEET</p> <p>1 OF 1</p>		<p>REV.</p> <p>A</p>	