
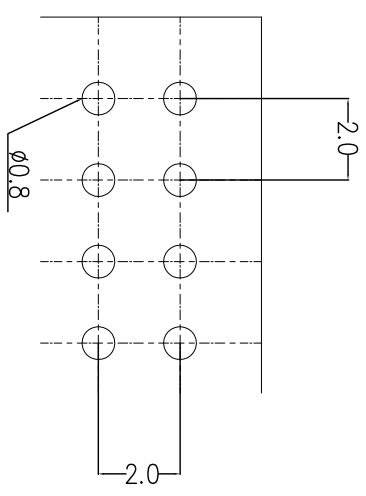



REV.	DESCRIPTION	DATE

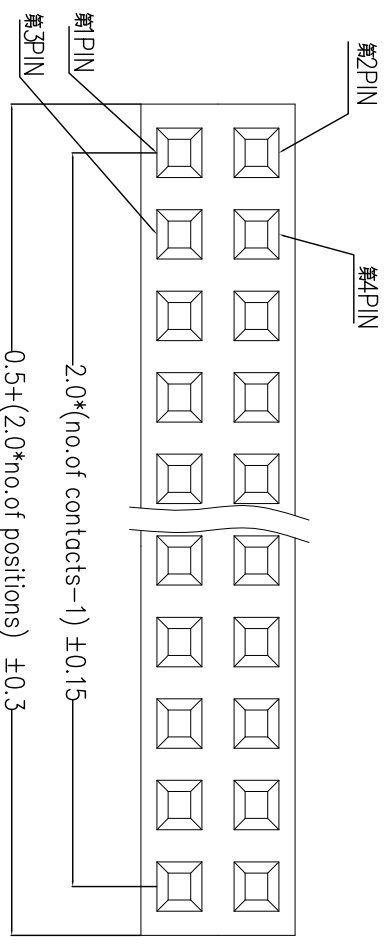

PCB Hole Layout

- NOTE:**
- Material:**
- Housing: Polyester, UL94V-0.
 - Terminal: Copper alloy. Gold-plated.
- Electrical:**
- Current rating: 2 Amp.
 - Contact resistance: 30mΩ Max.
 - Insulator resistance: 3000MΩ Min.
 - Dielectric withstanding: AC 500 V.
 - Temperature: -40°C ~ +105°C

Available pins: 06~100 contacts

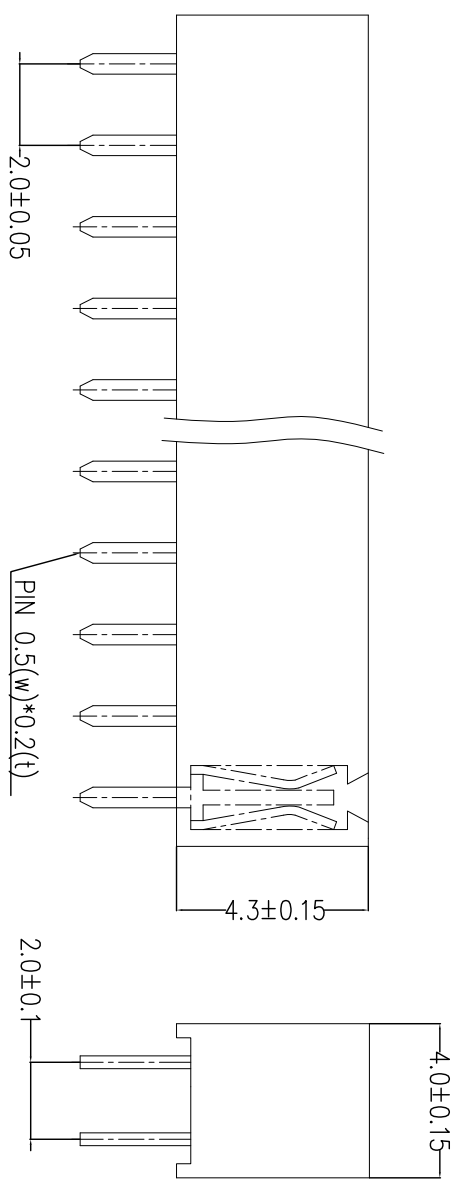

<p>TOLERANCE</p> <p>.X ±.XX</p> <p>.XX ±.XX</p> <p>.XXX ±.XX</p>	<p>DRAWER</p> <p><i>Chiu Chuan Siau</i></p>	<p>SynLight 日亮電子科技有限公司</p> <p><i>Sun-Light Electronic Technologies Inc.</i></p>
	<p>CHECK</p> <p><i>Shi Jiong Siau</i></p>	
<p>UNITS : mm</p> <p>SCALE FREE</p>	<p>DESIGNED</p> <p><i>Chiu Chuan Siau</i></p>	<p>NAME</p> <p>2.0mm Female Header H:4.3 W:4.0 180°</p> <p>雙排Double row</p>
	<p>APPROVAL</p> <p><i>Shaw Jeng Siau</i></p>	
<p>PART NO.</p> <p>F200-H43-DDIP-XX</p>	<p>DATE</p> <p>12 / 10 / 2010</p>	<p>DRAW NO.</p> <p>F200-H43-DDIP</p>
<p>SIZE</p> <p>A4</p>	<p>SHEET</p> <p>1 OF 1</p>	<p>REV.</p> <p>A</p>