
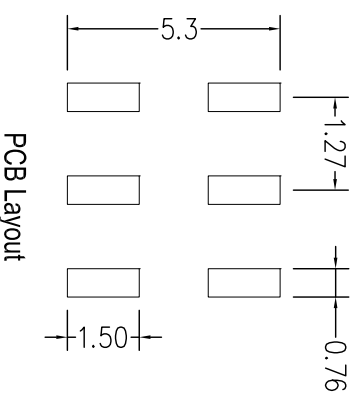




REV.	DESCRIPTION	DATE

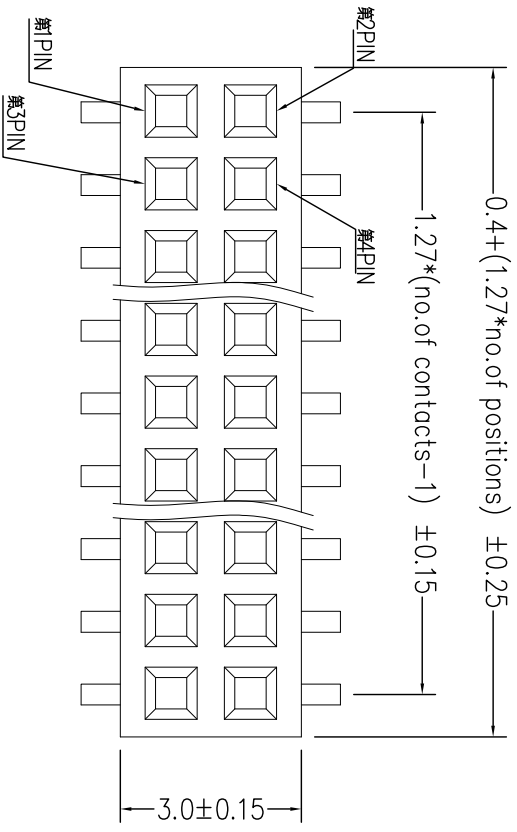

PCB Layout

- Material:**
1. Housing: Polyester. UL94V-0.
 2. Terminal: Copper alloy. Gold-plated.
- Electrical:**
1. Current rating: 1 Amp.
 2. Contact resistance: 30mΩ Max.
 3. Insulator resistance: 1000MΩ Min.
 4. Dielectric withstanding: AC 500V.
 5. Operating temperature: -40° ~ +105°

Available pins: 06~100 contacts

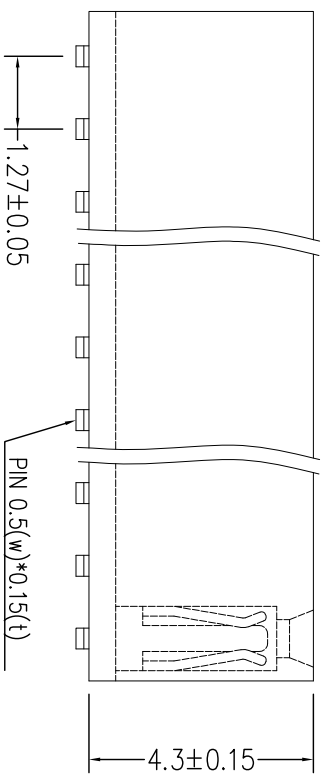

<p>TOLERANCE</p> <p>X ±.XX .XX ±.XX .XXX ±.XX</p>		<p>DRAWER <i>Chiu Chuan Siu</i></p>	
<p>UNITS : mm</p>		<p>CHECK <i>Mi Tsung Siu</i></p>	
<p>SCALE FREE</p>		<p>DESIGNED <i>Chiu Chuan Siu</i></p>	
<p>SIZE A4</p>		<p>APPROVAL <i>Miao Tsung Siu</i></p>	
<p>DATE 12 / 10 / 2010</p>		<p>NAME 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i></p>	
<p>SHEET 1 OF 1</p>		<p>PART NO. F-1270-H45-DSMT-XX</p>	
<p>REV. A</p>		<p>NAME 1.27mm Female Header H: 4.5mm W:3.0mm 雙排 Doble row SMT type</p>	
<p>SCALE FREE</p>		<p>REV. A</p>	