



REV.	DESCRIPTION	DATE


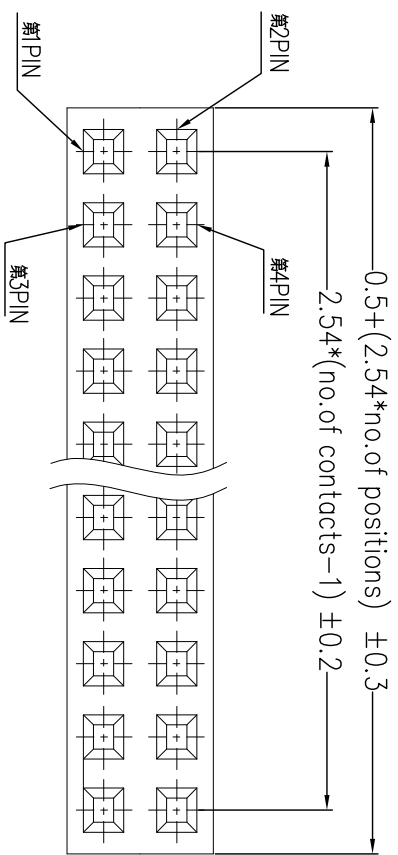


PCB Hole Layout

NOTE:
Material:
 1. Housing: Polyester, UL94V-0.
 2. Terminal: Copper alloy. Gold-plated.

Electrical:
 1. Current rating: 3 Amp.
 2. Contact resistance: 30mΩ Max.
 3. Insulator resistance: 5000MΩ Min.
 4. Dielectric withstand: AC 1000 V.
 5. Temperature: -40°C ~ +105°C

Available pins: 04~80 contacts

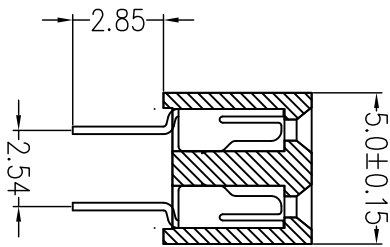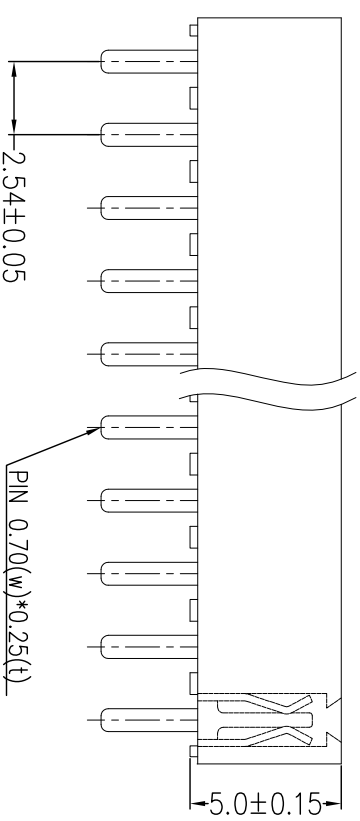

TOLERANCE .X ±.XX .XX ±.XX .XXX ±.XX		DRAWER <i>Qiu Qiu Qiu</i> CHECK <i>Shi Jiong Shu</i>	
UNITS : mm 		DESIGNED <i>Qiu Qiu Qiu</i> APPROVAL <i>Shi Jiong Shu</i>	
SCALE FREE		DATE 12 / 10 / 2010	
SIZE A4		PART NO. F2540-H50-DDIP-XX	
NAME 2.54mm Female Header H:5.0 W:5.0 180° 雙排 Double row		DRAWING NO. F2540-H50-DDIP	
SCALE FREE		SHEET 1 OF 1	
REV. A		REV. A	

SynLight 日亮電子科技有限公司
Sun-light Electronic Technologies Inc.