


PCB Hole Layout

**Material:**  
 1. Housing: Polyester. UL 94V-0.  
 2. Terminal: Copper alloy. Gold-plated.

**Electrical:**  
 1. Current rating: 2 Amp.  
 2. Insulator resistance: 3000MΩ Min.  
 3. Dielectric withstanding: AC 1000V.  
 4. Operating temperature: -40° ~ +105°

Available pins: 02~40 contacts

REV.	DESCRIPTION	DATE

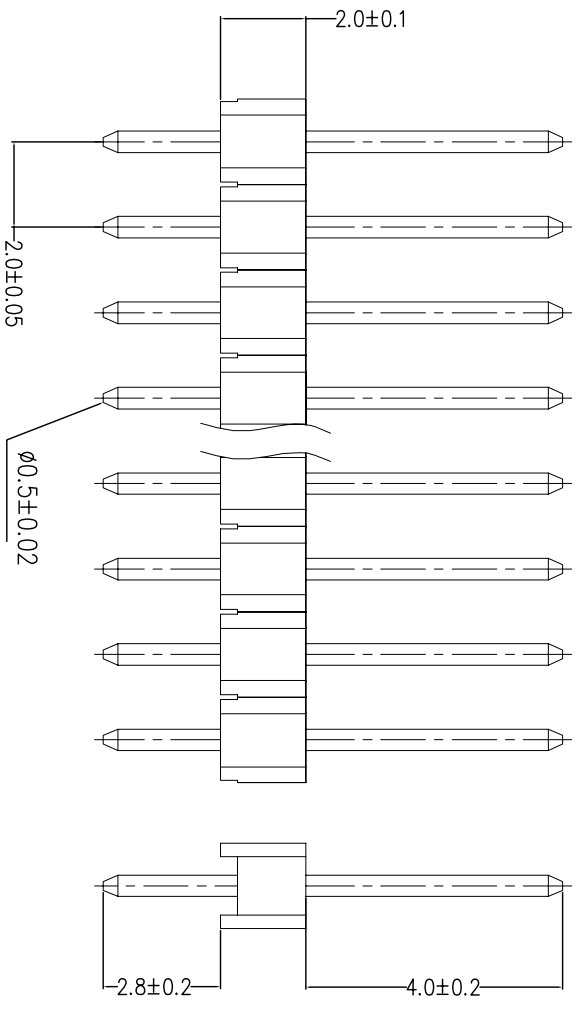

TOLERANCE X ±.XX XX ±.XX .XXX ±.XX	DRAWER	Chiu Chuan Siu	日亮電子科技有限公司 Sun-Light Electronic Technologies Inc.	
	CHECK	Chiu Chuan Siu		
UNITS : mm SCALE FREE	DESIGNED	Chiu Chuan Siu	NAME	2.0mm Pin Header H:2.0mm 180°
	APPROVAL	Shaw Jeng Siu	PART NO.	P200-H20-S180-XX
	DATE	12 / 10 / 2010	DRAW NO.	P200-H20-S180
	SIZE	A4	REV.	A
			SHEET	1 OF 1