

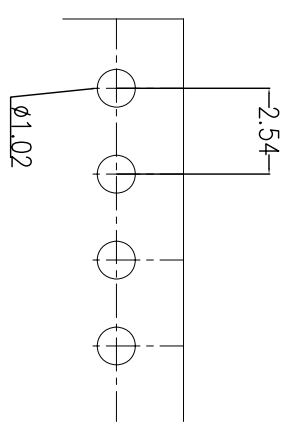


REV.	DESCRIPTION	DATE

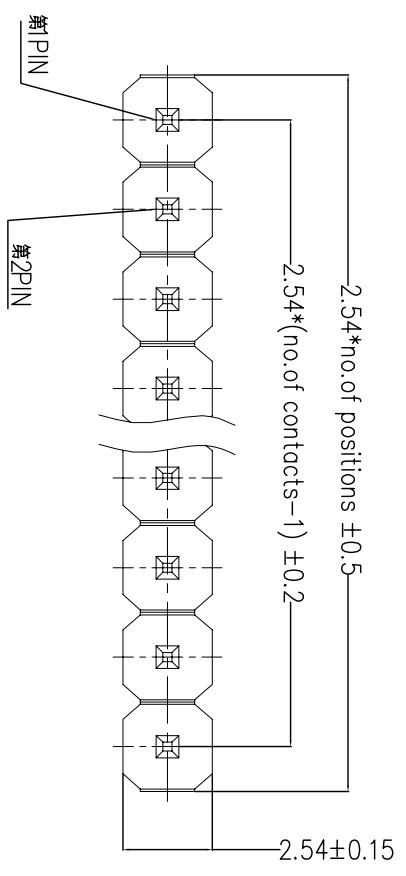

PCB Hole Layout

- NOTE:
- Material:
- 1.Housing: Polyester, UL94V-0.
 - 2.Terminal: Copper alloy.
 - 3.Plating: Gold-plated.
- Electrical:
- 1.Current rating: 3 Amp.
 - 2.Insulator resistance: 5000M Ω /Min.
 - 3.Dielectric withstand: AC 1000 V.
 - 4.Temperature: -40°C ~ +105°C
- Available pins: 02~40 contacts

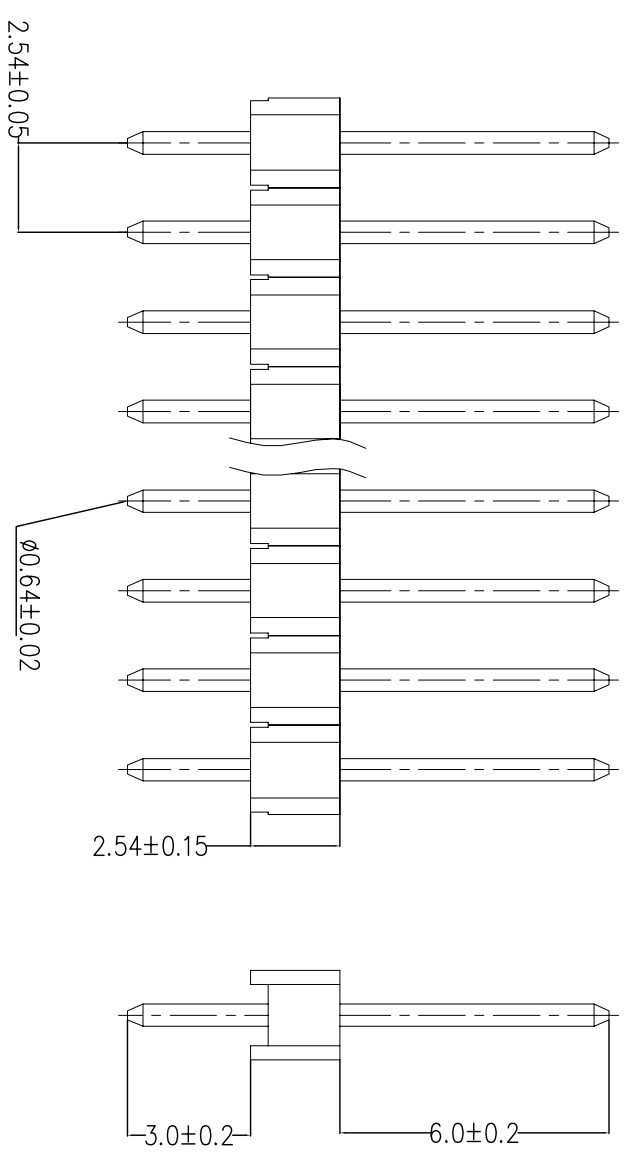

<p>TOLERANCE</p> <p>X ±.XX</p> <p>.XX ±.XX</p> <p>.XXX ±.XX</p>	<p>DRAWER</p> <p><i>Chiu Chuan Siu</i></p>	<p>SynLight 日亮電子科技有限公司</p> <p><i>SynLight Electronic Technologies Inc</i></p>
	<p>CHECK</p> <p><i>Mhi Jung Siu</i></p>	
<p>UNITS : mm</p> <p>SCALE FREE</p>	<p>DESIGNED</p> <p><i>Chiu Chuan Siu</i></p>	<p>PART NO.</p> <p>P2540-H254-S180-XX</p>
	<p>APPROVAL</p> <p><i>Miao Tseng Siu</i></p>	
<p>DATE</p> <p>12 / 10 / 2010</p>	<p>NAME</p> <p>2.54mm Pin Header 180°</p>	<p>DRAW NO.</p> <p>P2540-H254-S180</p>
<p>SIZE</p> <p>A4</p>	<p>SHEET</p> <p>1 OF 1</p>	<p>REV.</p> <p>A</p>