

REV.	DESCRIPTION	DATE

Material:





- 1. Housing: Polyester. UL94V-0.
- 2. Terminal: Copper alloy. Gold-plated.

Electrical:

- 1. Current rating: 3 Amp.
- 2. Insulator resistance: 5000MΩ Min.
- 3. Dielectric withstanding: AC 1000V.
- 4. Operating temperature: -40° ~ +105°

Available pins: 02~40 contacts

PCB Hole Layout

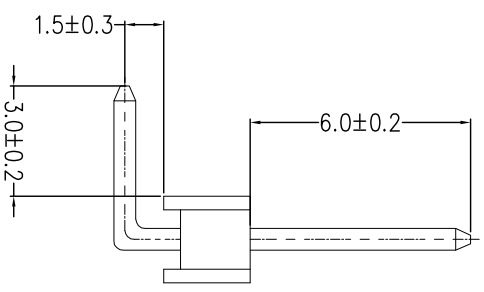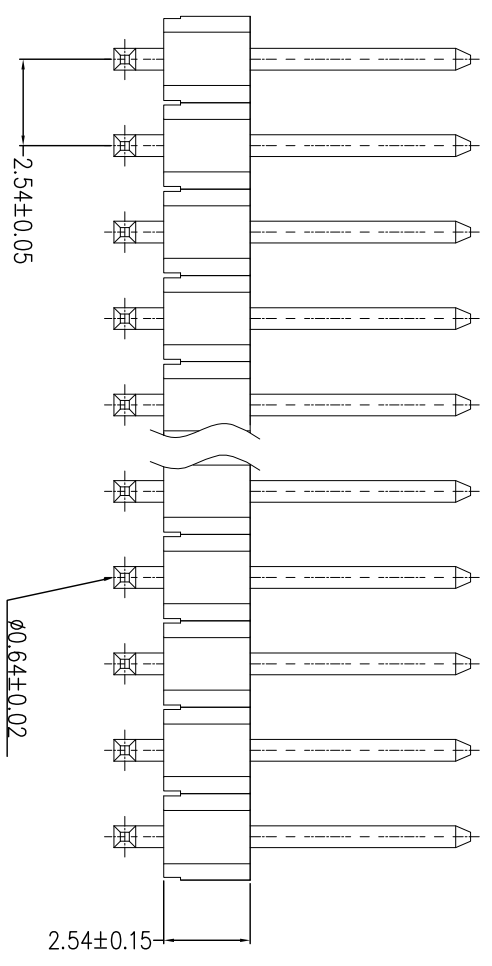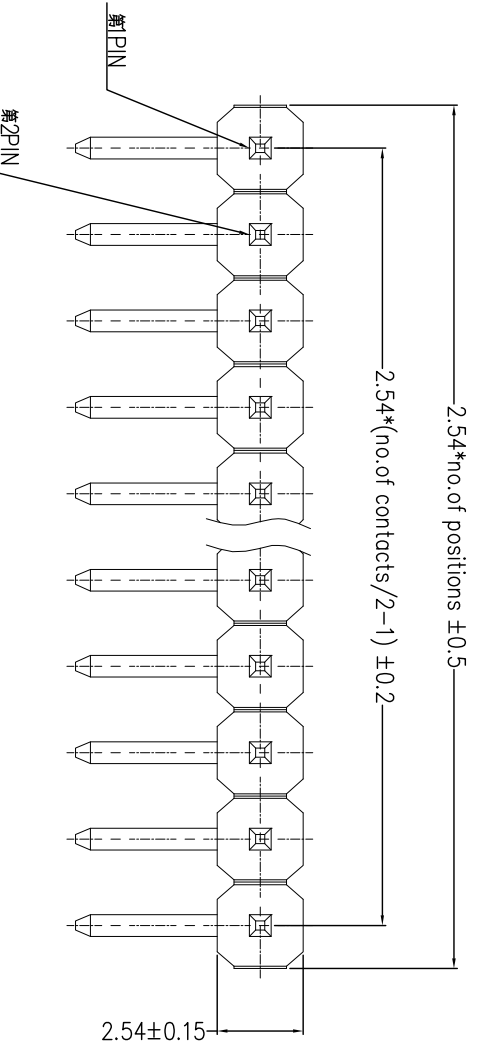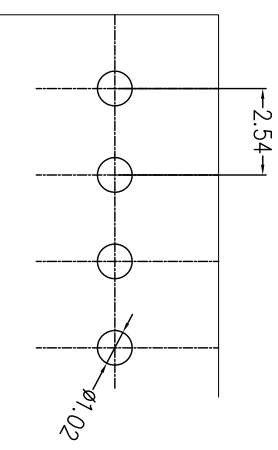

<p>TOLERANCE X ±.XX XX ±.XX .XXX ±.XX</p>		<p>DRAWER <i>Chiu Chuan Siu</i></p>	
<p>UNITS : mm</p>		<p>CHECK <i>Mi Tsung Siu</i></p>	
<p>SCALE FREE</p>		<p>DESIGNED <i>Chiu Chuan Siu</i></p>	
<p>SIZE A4</p>		<p>APPROVAL <i>Miao Tsung Siu</i></p>	
<p>DATE 10 / 19 / 2011</p>		<p>NAME 日亮電子科技有限公司 <i>Sun-light Electronic Technologies Inc</i></p>	
<p>SHEET 1 OF 1</p>		<p>PART NO. P2540-H254-S90-XX</p>	
<p>REV. A</p>		<p>DRAW NO. P2540-H254-S90</p>	