

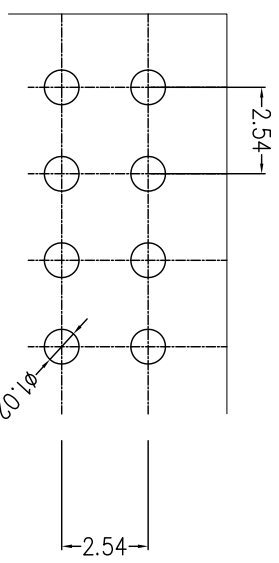
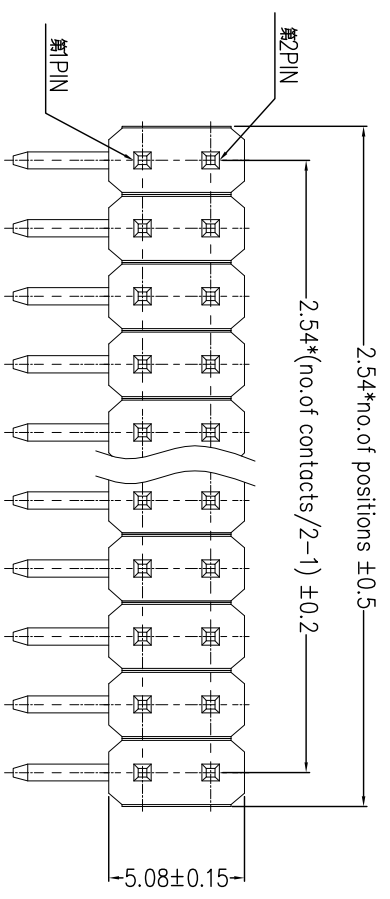


REV.	DESCRIPTION	DATE

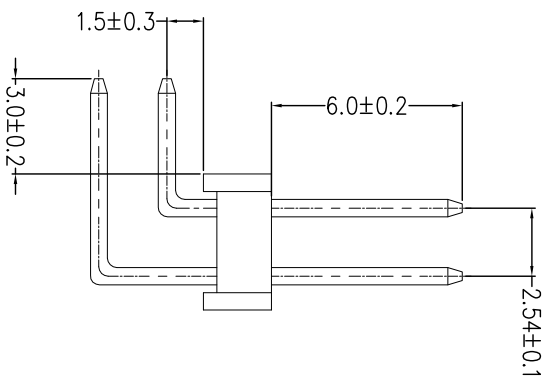

PCB Hole Layout

- Material:**
- Housing: Polyester. UL94V-0.
  - Terminal: Copper alloy. Gold-plated.
- Electrical:**
- Current rating: 3 Amp.
  - Insulator resistance: 5000MΩ Min.
  - Dielectric withstanding: AC 1000V.
  - Operating temperature: -40° ~ +105°
- Available pins: 04~80 contacts

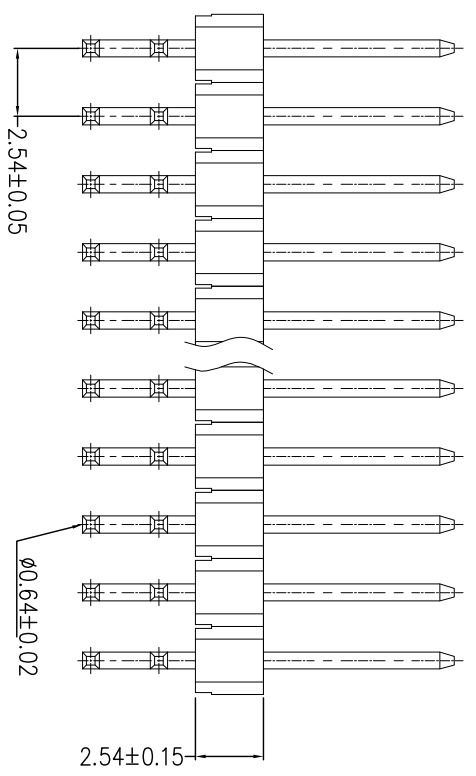

TOLERANCE X ±.XX XX ±.XX .XXX ±.XX	DRAWER	日亮電子科技有限公司 <i>Sun-light Electronic Technologies Inc.</i>
	CHECK	
UNITS : mm 	DESIGNED	NAME 2.54mm Pin Header H:2.54mm 90° 雙排 Double row
	APPROVAL	
SCALE	DATE	PART NO.
FREE	10 / 19 / 2011	P2540-H254-D90-XX
	SIZE	REV.
	A4	P2540-H254-D90
		SHEET
		1 OF 1
		REV.
		A